

Kioxia CM7-V 6.4TB SSD Test Results - OpenFlex Data24 4100



The Third Party Test Results for the Kioxia CM7-V are based on a comprehensive evaluation to ensure compatibility, performance, and reliability performed by the Open Composable Compatibility Lab (OCCL). The assessment covers basic interoperability and specialized workload performance using industry-standard benchmarking tools. This test result is not an endorsement of the third-party product by Western Digital and no warranty of the product is expressed or implied by Western Digital or the OCCL.

For more information related OCCL, see: <https://www.opencomposable.com/>.

Drive Details

Drive	Kioxia CM7-V
Form Factor	U.3 15mm
Interface	PCIe® Gen5, NVMe™ 2.0
Security	SIE
Power	25W (Active)
Power Idle	5W
Part Number	KCMYXVUG6T40

The following table displays the status and results of the testing of a specific device. The four columns represent specific configurations which progressively increase in terms of complexity in the following order: Local benchmark x1 > Data24-4100 x1 > Data24 x8-4100 > Data24-4100 x24. All devices will start with the Local x1 and Data24-4100 x1. Poor performance or interoperability issues in any configuration can eliminate the device from further consideration. The individual tests are consistent with general industry practices and reporting. Western Digital's OpenFlex™ Data24 NVMe-oF™ Storage Platform extends the high performance of NVMe flash to shared storage. The storage platform provides low-latency sharing of NVMe SSDs over a high-performance Ethernet fabric to deliver similar performance to locally attached NVMe SSDs.

For additional information on Western Digital's OpenFlex Data24 NVMe-oF Storage Platform, see:

<https://www.westerndigital.com/products/data-center-platforms/openflex-data24-nvme-of-platform?sku=1ES2380>.

Kioxia CM7-V 6.4TB Top Line Performance

Test Description	Local x1	Data24-4100 x1	Data24-4100 x8	Data24-4100 x24 ¹
Read Bandwidth (128KB) MB/s	7,031	7,152	43,222	124,370
Write Bandwidth (128KB) MB/s	6,846	6,496	40,268	103,180
Random Read (4KB) K IOPS	1,679	1,705	8,447	29,406
Random Write (4KB) K IOPS	569	568	4,478	13,591
Random Mixed (4KB) K IOPS	1,103	1,085	5,787	18,233
4K Random Write Latency (µs)	7	20	18	19
4K Random Read Latency (µs)	63	74	72	72
4K Random Write 4-9s µs	10	24	24	26
4K Random Read 4-9s µs	104	114	110	121

¹ The x24 results are extrapolated from the x8 data. Given the highly independent nature of the Data24 architecture, these extrapolations are supported by the scaling trends in measured results and other historical observations.

Kioxia CM7-V SSD Test Results

The Normalized Test Results Table show the scalability from one to 24 devices using the Local x1 configuration as the baseline. With perfect linearity, the 8-device test would provide 8X the performance of the one device test and the 24-device test would provide 24X performance. For these charts, the baseline is always the Local x1 configuration therefore the value of the Local x1 configuration is set to 1.00X.

- IF = 1.00X: The same performance as the baseline.
- IF > 1.00X: Faster / Better performance than the baseline.
 - Example: 2.00X is twice as fast as the baseline.
- IF < 1.00X: Slower / Worse performance than the baseline.
 - Example: if the Normalized performance is 0.50X, then it is only one-half as fast as the Baseline.

The following table displays tests 2-4 normalized to test 1 (Local x1), the percentages in tests 2-4 should generally increase with more complex and larger configurations. The two QoS values (4-9s) by there stocastic behavior can have significant variability.

Kioxia CM7-V 6.4TB Normalized to Local x1 Top Line Performance

Test Description	Local x1	Data24-4100 x1	Data24-4100 x8	Data24-4100 x24
Read Bandwidth (128KB) MB/s	1.000X	1.017X	6.147X	17.688X
Write Bandwidth (128KB) MB/s	1.000X	0.949X	5.882X	15.071X
Random Read (4KB)K IOPS	1.000X	1.015X	5.032X	17.518X
Random Write (4KB) K IOPS	1.000X	0.999X	7.876X	23.904X
Random Mixed (4KB) K IOPS	1.000X	0.984X	5.248X	16.534X
4K Random Write Latency (μs)	1.000X	0.333X	0.356X	0.345X
4K Random Read Latency (μs)	1.000X	0.856X	0.883X	0.879X
4K Random Write 4-9s μs	1.000X	0.420X	0.404X	0.382X
4K Random Read 4-9s μs	1.000X	0.907X	0.938X	0.854X

Coefficients of Variation (CoV) are a standard statistical measure that are directly comparable to other CoVs as opposed to Standard Deviations (SD) that can only be compared if the mean is the same for two sets of data. $CoV = SD/MEAN$. NAND storage has a higher variability than DRAM, for example, that is highly consistent. NAND is a noise technology that has higher error rates than most solid state memory. Each manufacturing process has its own baseline error rate. These error rates are based on one second intervals provided by standard monitoring tools like iostat.


Kioxia CM7-V 6.4TB CoV Analysis

Test Description	Local x1	Data24-4100 x1	Data24-4100 x8	Data24-4100 x24
Read Bandwidth (128KB) MB/s	0.000%	0.001%	1.604%	0.698%
Write Bandwidth (128KB) MB/s	0.007%	0.010%	0.465%	1.280%
Random Read (4KB)K IOPS	0.000%	0.037%	0.005%	0.014%
Random Write (4KB) K IOPS	0.010%	0.059%	0.031%	0.019%
Random Mixed (4KB) K IOPS	0.088%	0.193%	0.059%	0.123%
4K Random Write Latency (μs)	2.898%	3.814%	0.058%	0.103%
4K Random Read Latency (μs)	0.164%	0.185%	0.072%	0.016%
4K Random Write 4-9s μs	1.222%	4.386%	0.740%	0.884%
4K Random Read 4-9s μs	0.466%	0.000%	0.219%	0.265%

Exceedance Chart

The following charts contain the most technical and most accurate information. Exceedance charts are typically used for only single drive, single process, queue depth one analysis as in the following example. The chart is the most fundamental measurement of SSD or disk performance as it shows the minimum latency as well as the expected error rate and latency for the device under test. These results are often referred to as the “number of nines”. For example, “4-9s” shows the latency or response time for 9999 of 10000 IOs. The number of IOs grows exponentially with the increase in the number of nines. The last two rows of the Top Line Performance Chart provides the 4-9s values for 4K Random Reads and Writes. Random writes are faster than random reads, because random writes are cached in the asynchronous write buffer and are periodically written to the underlying NAND media. Exceedance charts can be run and compared as long as all tests were run on similar systems using the same workload.

Latency Exceedance for Kioxia CM7-V

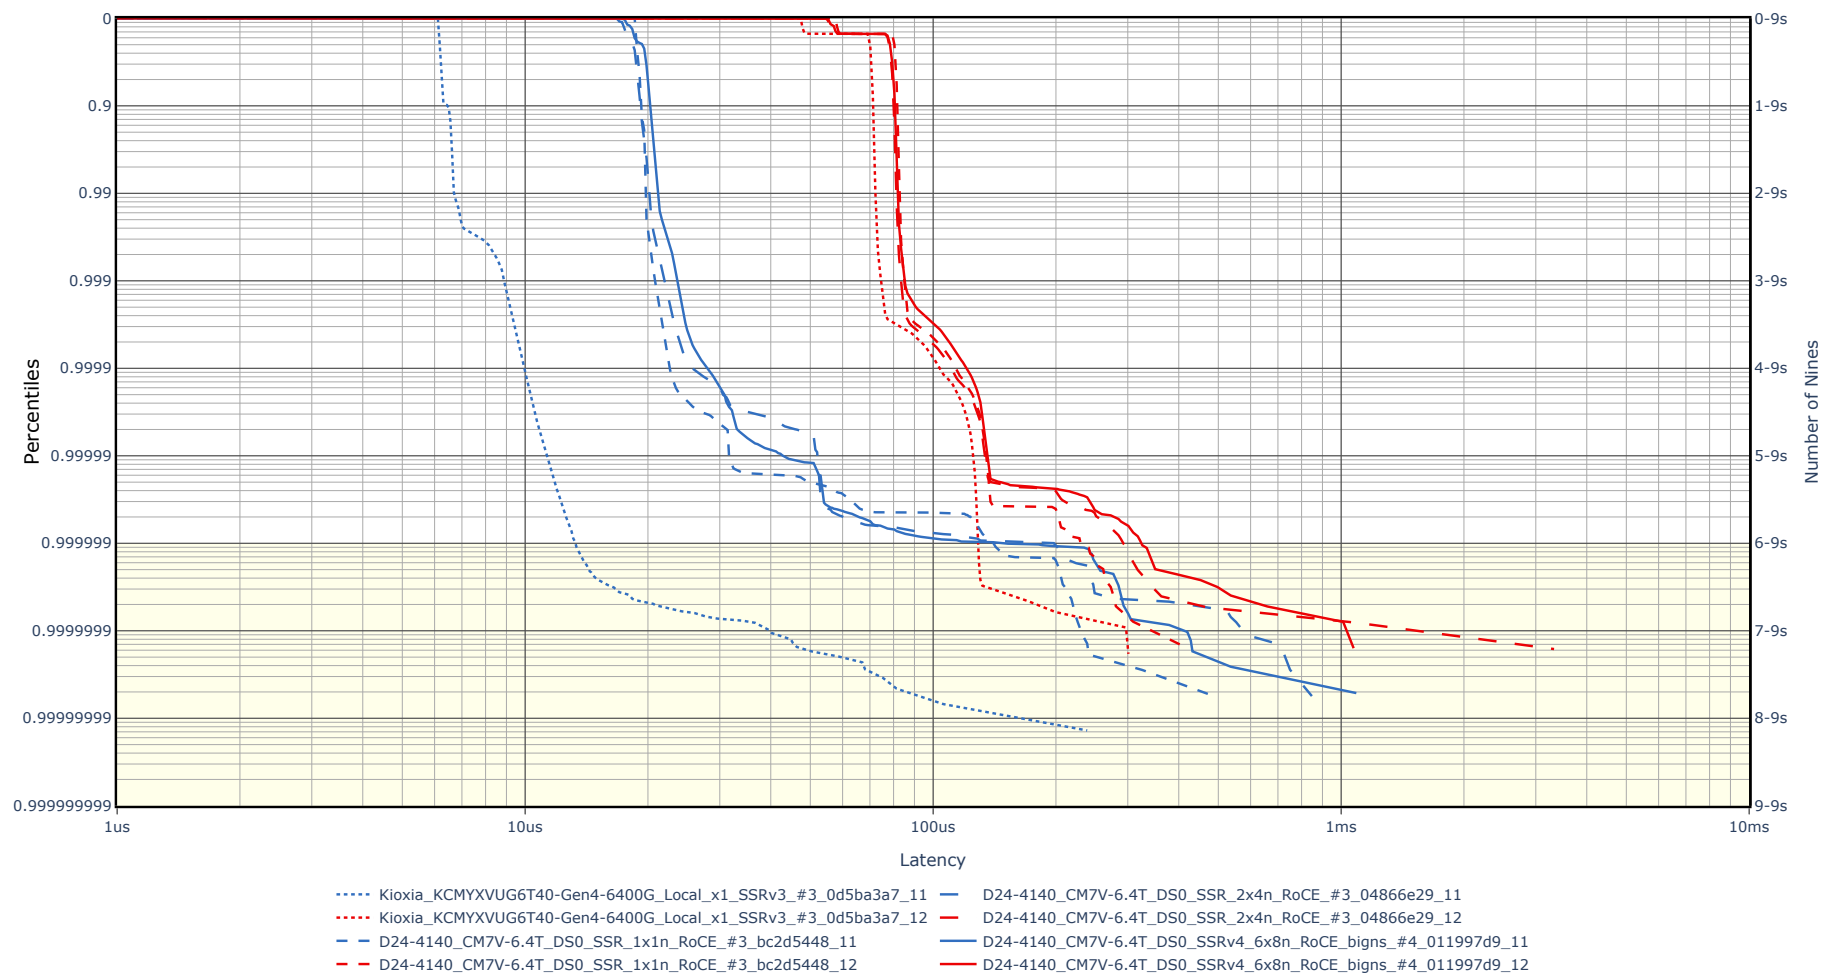

5601 Great Oaks Parkway
San Jose, CA 95119, USA
www.westerndigital.com

© 2025 Western Digital Corporation or its affiliates. All rights reserved. Western Digital, the Western Digital logo, OpenFlex, RapidFlex, and Ultrastar are registered trademarks or trademarks of Western Digital Corporation or its affiliates in the US and/or other countries. The NVMe and NVMe-oF word marks are trademarks of NVM Express, Inc. PCIe® is a registered trademark and/or service mark of PCI-SIG in the United States and/or other countries. All other marks are the property of their respective owners. References in this publication to Western Digital products, programs, or services do not imply that they will be made available in all countries. Product specifications provided are sample specifications and do not constitute a warranty. Actual specifications for unique part numbers may vary. Pictures shown may vary from actual products.